

FIG. 1

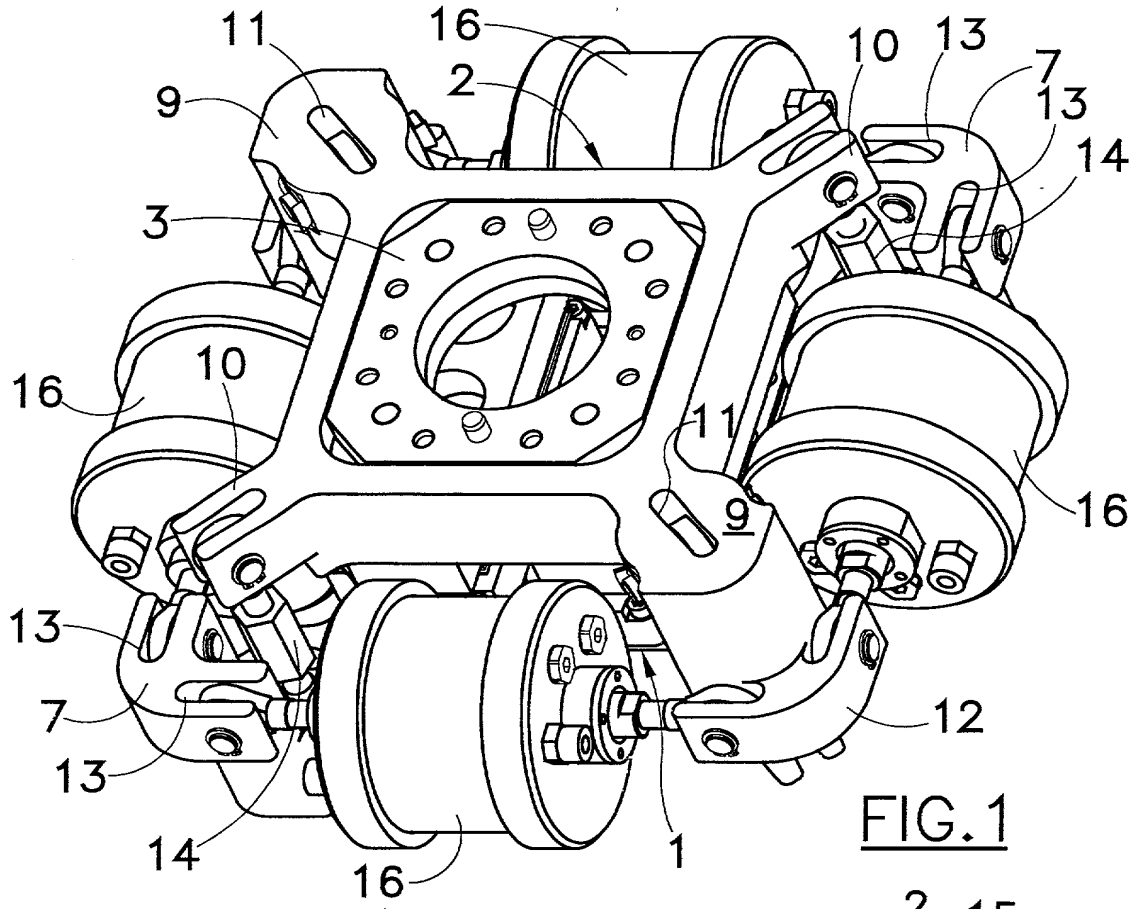


FIG. 1

FIG. 4

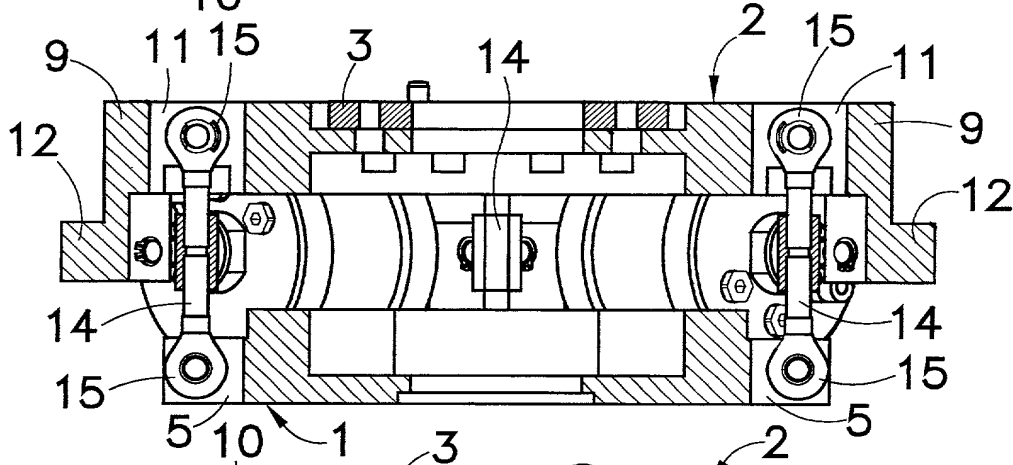
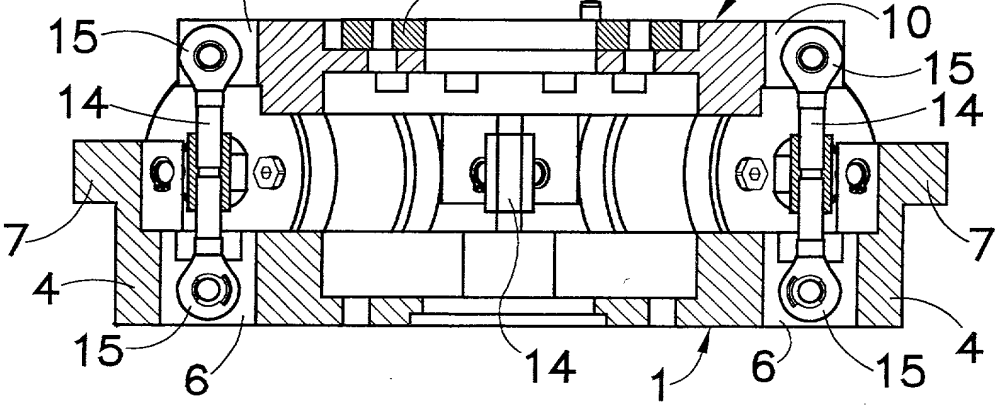


FIG. 5



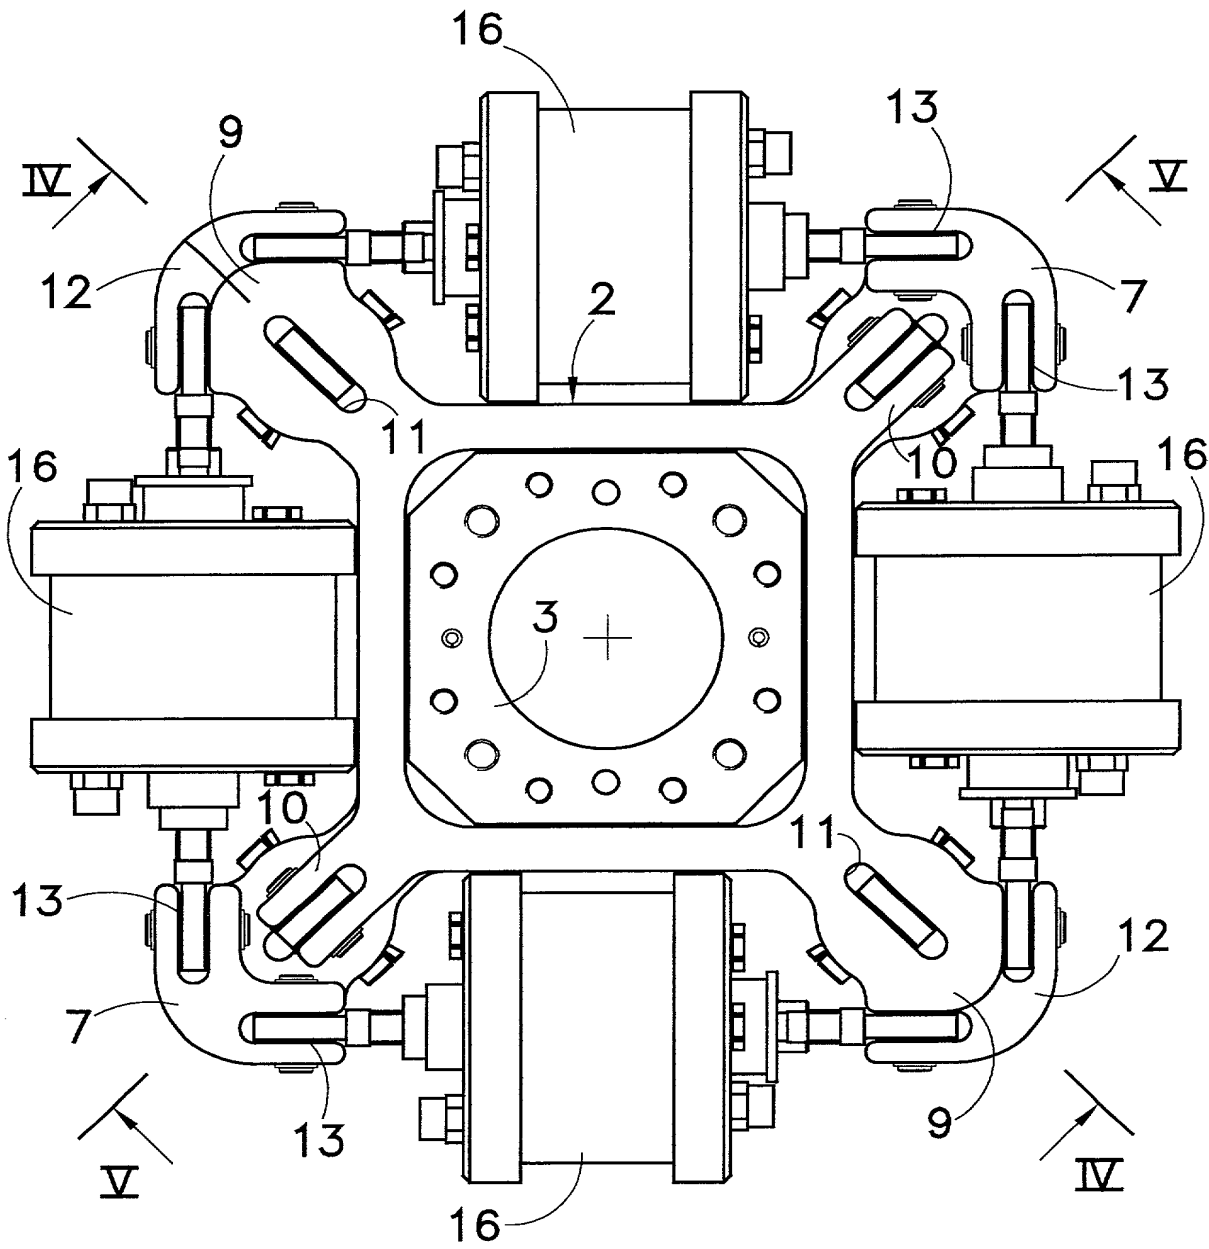


FIG.2

FIG. 3 is a top view of the device 100 showing the four actuators 12 and the central opening 1. The actuators 12 are arranged in a square pattern around the central opening 1. Each actuator 12 includes a piston rod 4, a piston 5, and a housing 7. The piston rod 4 is connected to the piston 5, which is in turn connected to the housing 7. The housing 7 is mounted on a base 16. The central opening 1 is a circular opening in the center of the device 100. The device 100 is shown in a top view, with the central opening 1 at the top center. The actuators 12 are arranged in a square pattern around the central opening 1. Each actuator 12 includes a piston rod 4, a piston 5, and a housing 7. The piston rod 4 is connected to the piston 5, which is in turn connected to the housing 7. The housing 7 is mounted on a base 16. The central opening 1 is a circular opening in the center of the device 100. The device 100 is shown in a top view, with the central opening 1 at the top center.

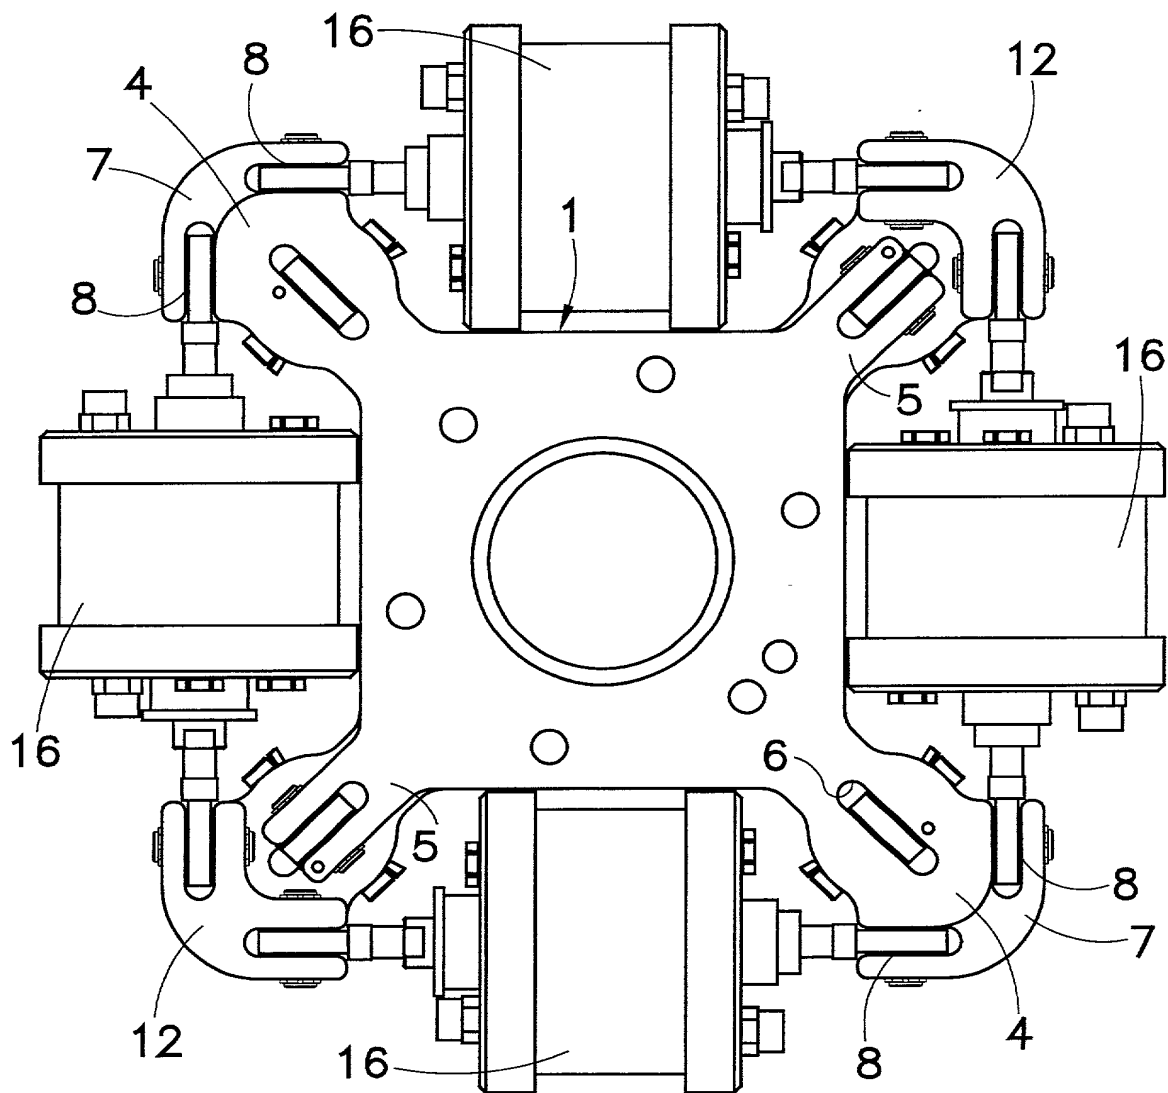
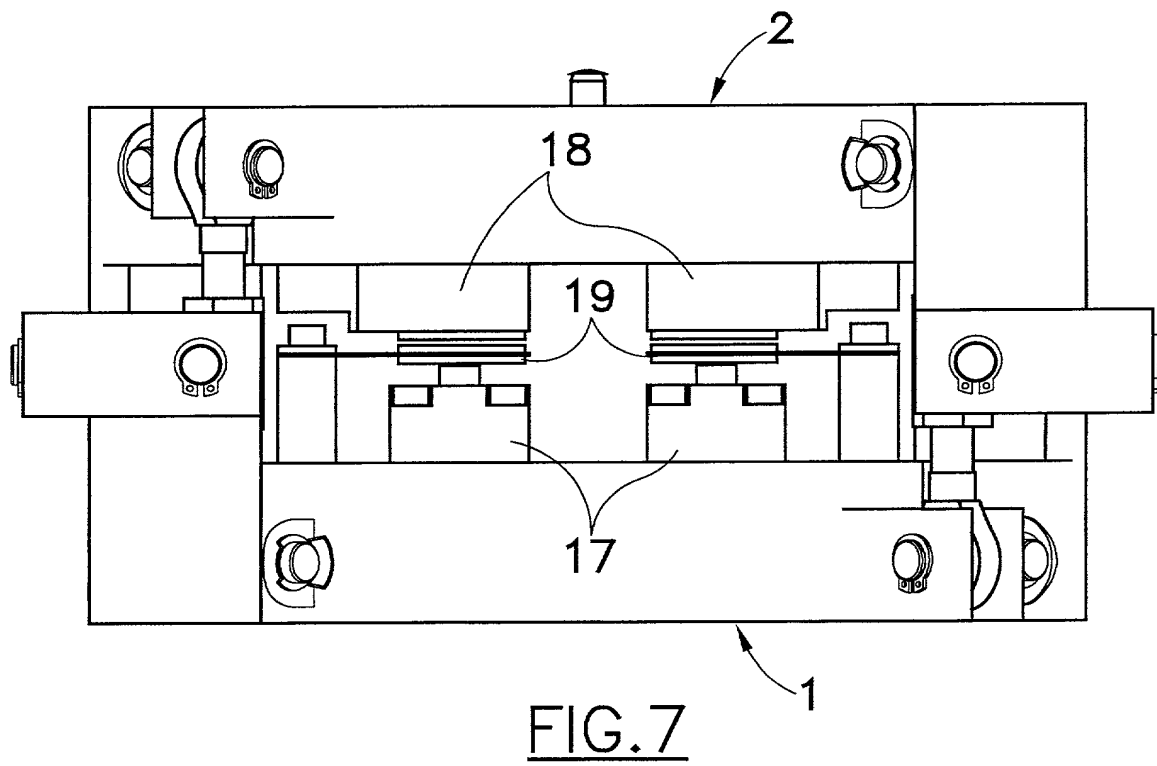
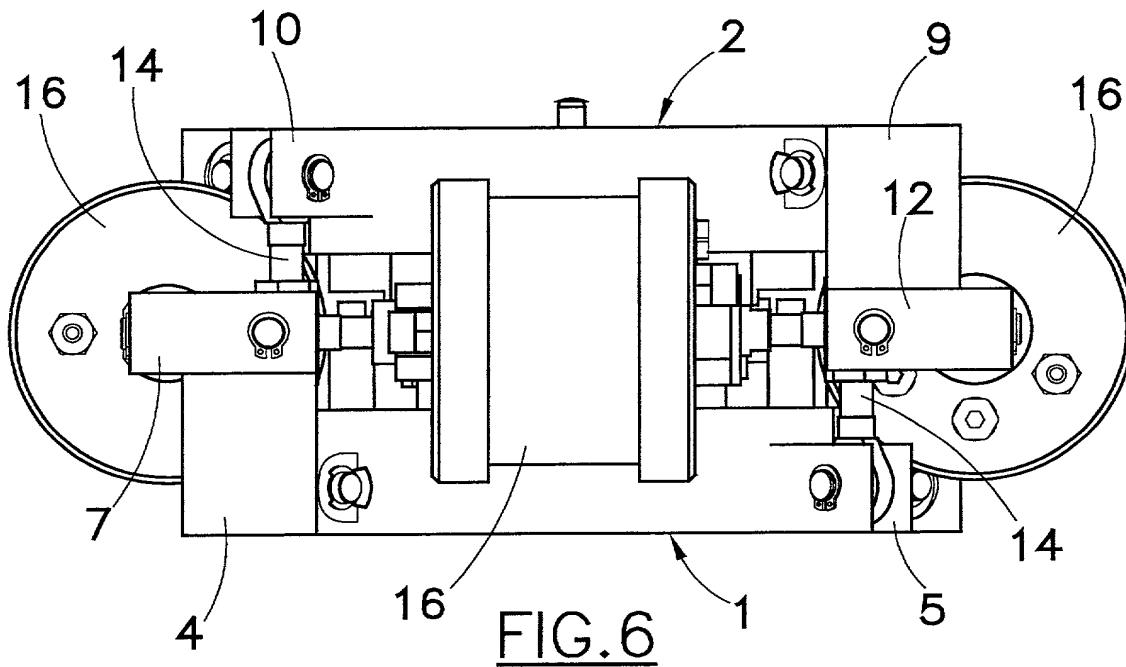
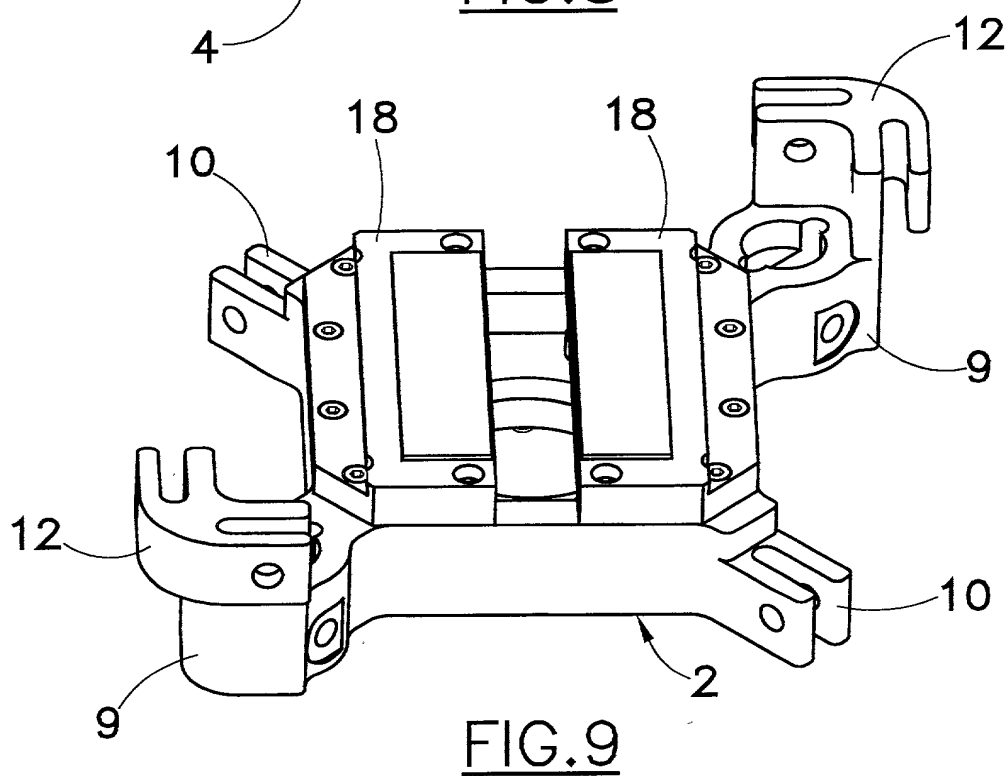
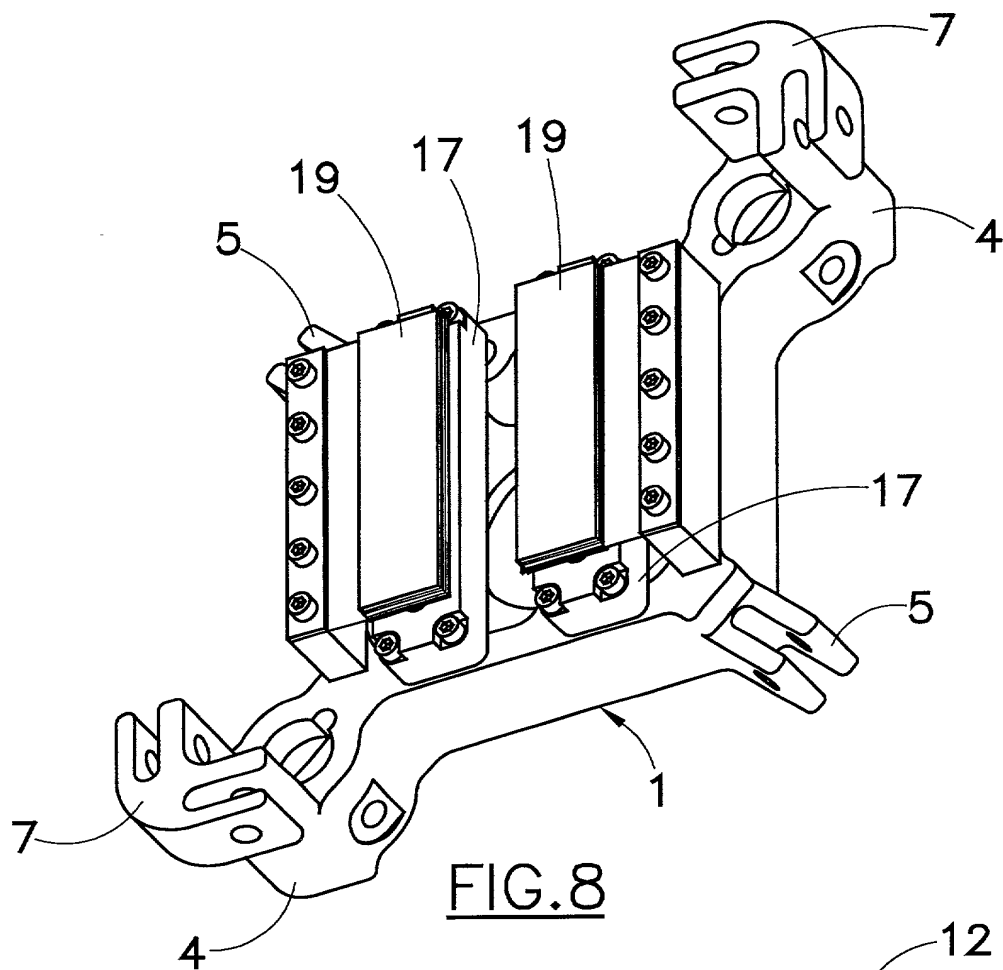


FIG.3







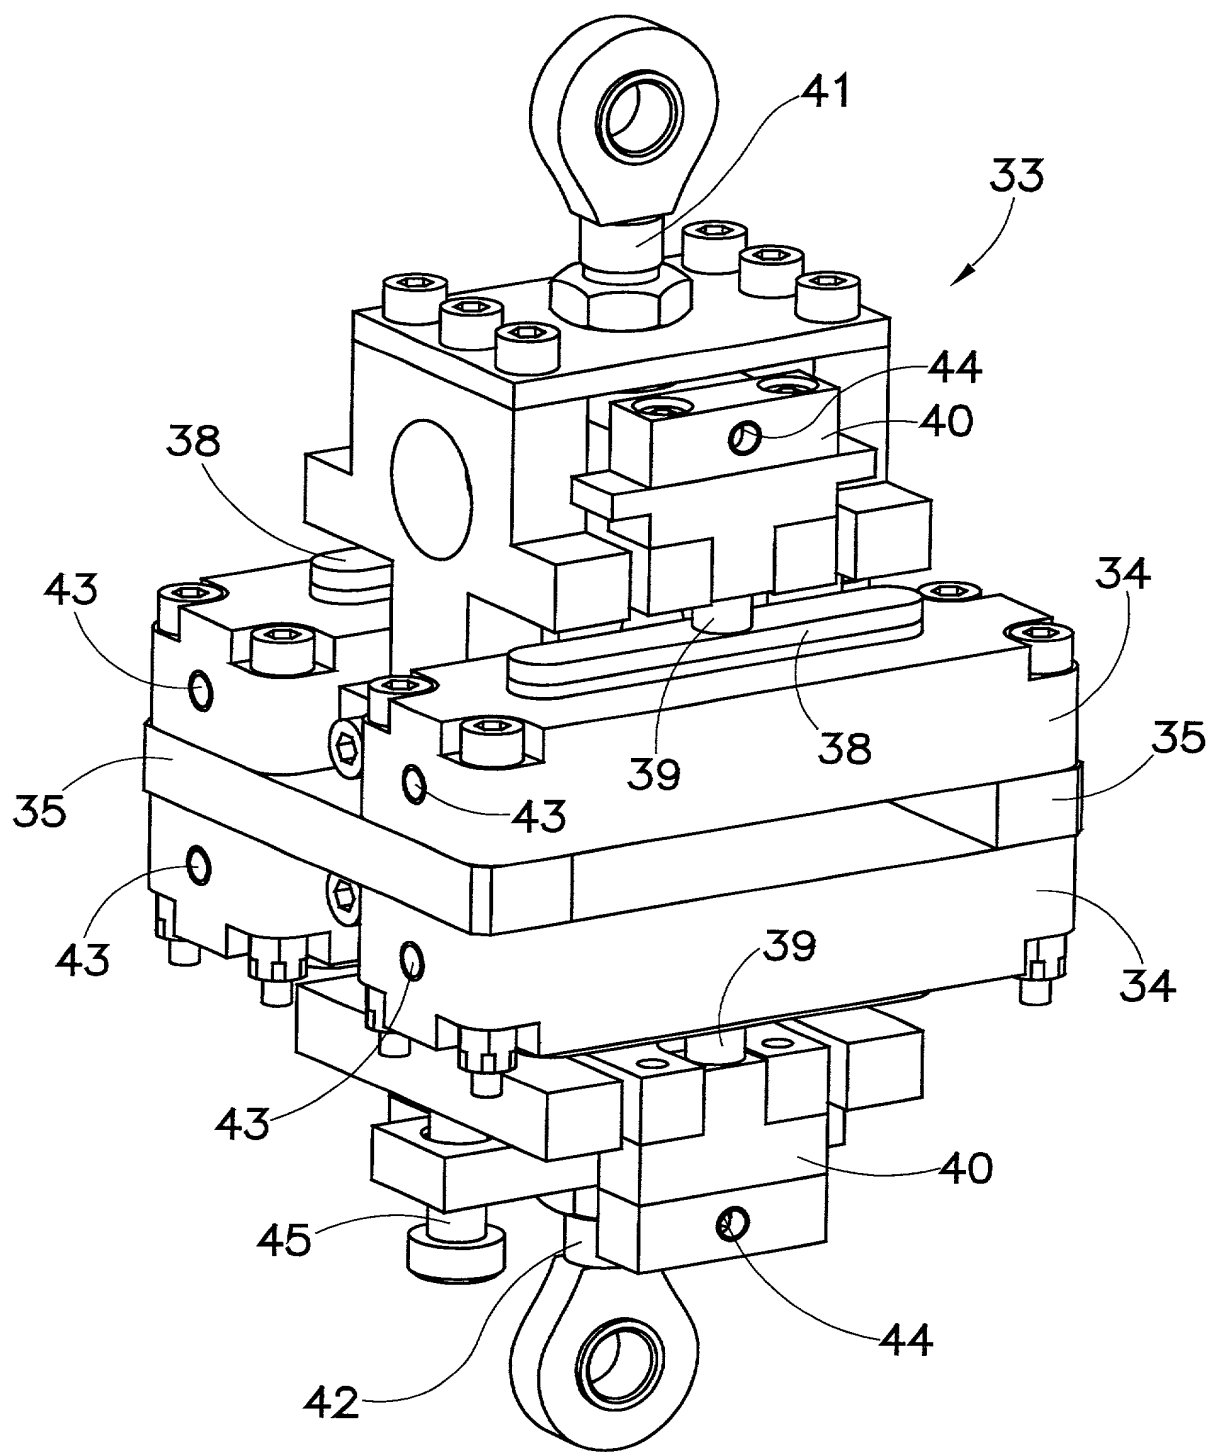


FIG.11

2025 RELEASE UNDER E.O. 14176

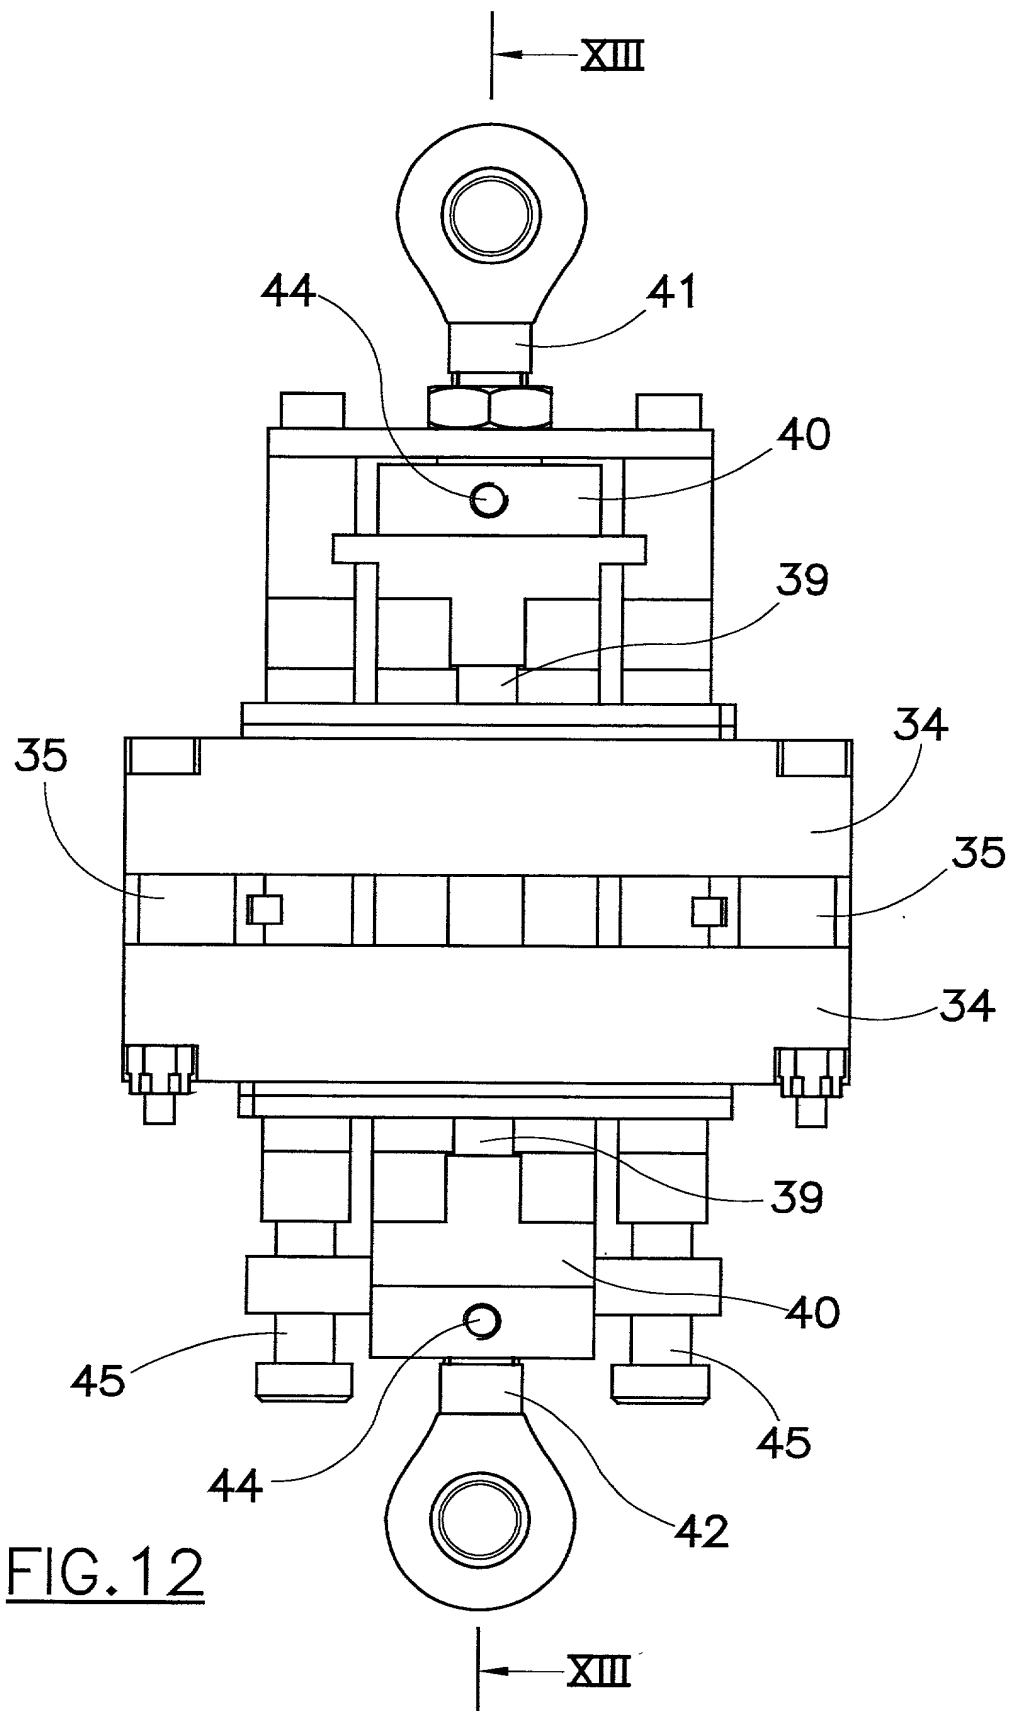


FIG. 12



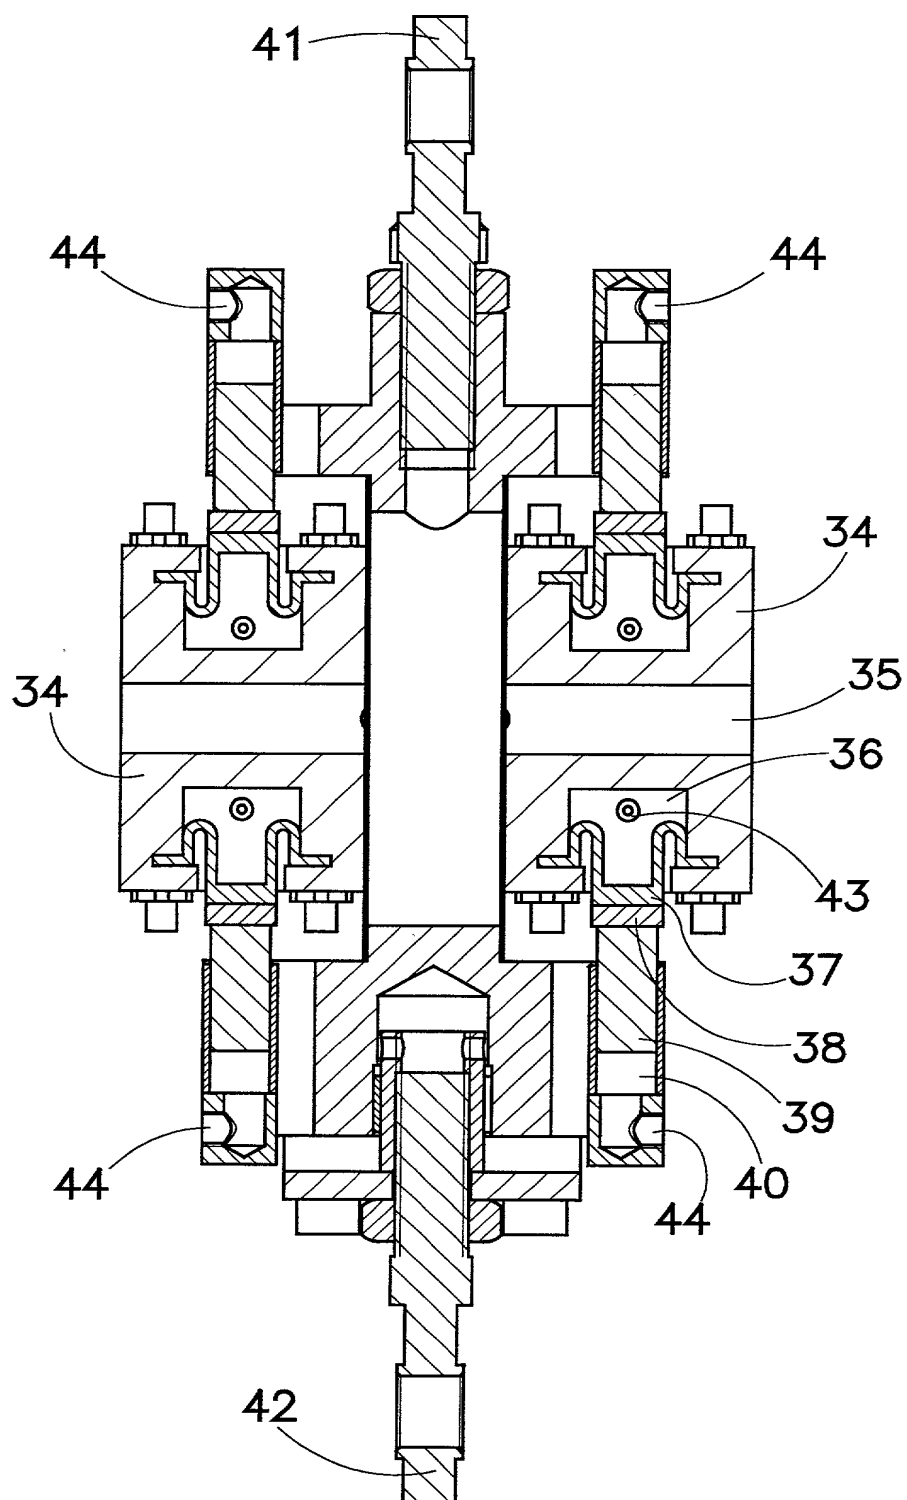


FIG.13



FIG. 15 is a cross-sectional view of a mechanical assembly, showing a central shaft (41) passing through a housing (34) and a central body (35). The shaft (41) is secured by a nut (42) and a washer (45) at the bottom. The housing (34) is secured by a nut (42) and a washer (45) at the top. The central body (35) is secured by a nut (42) and a washer (45) at the bottom. The assembly is shown in a cross-sectional view, with the central shaft (41) and central body (35) being the primary components.

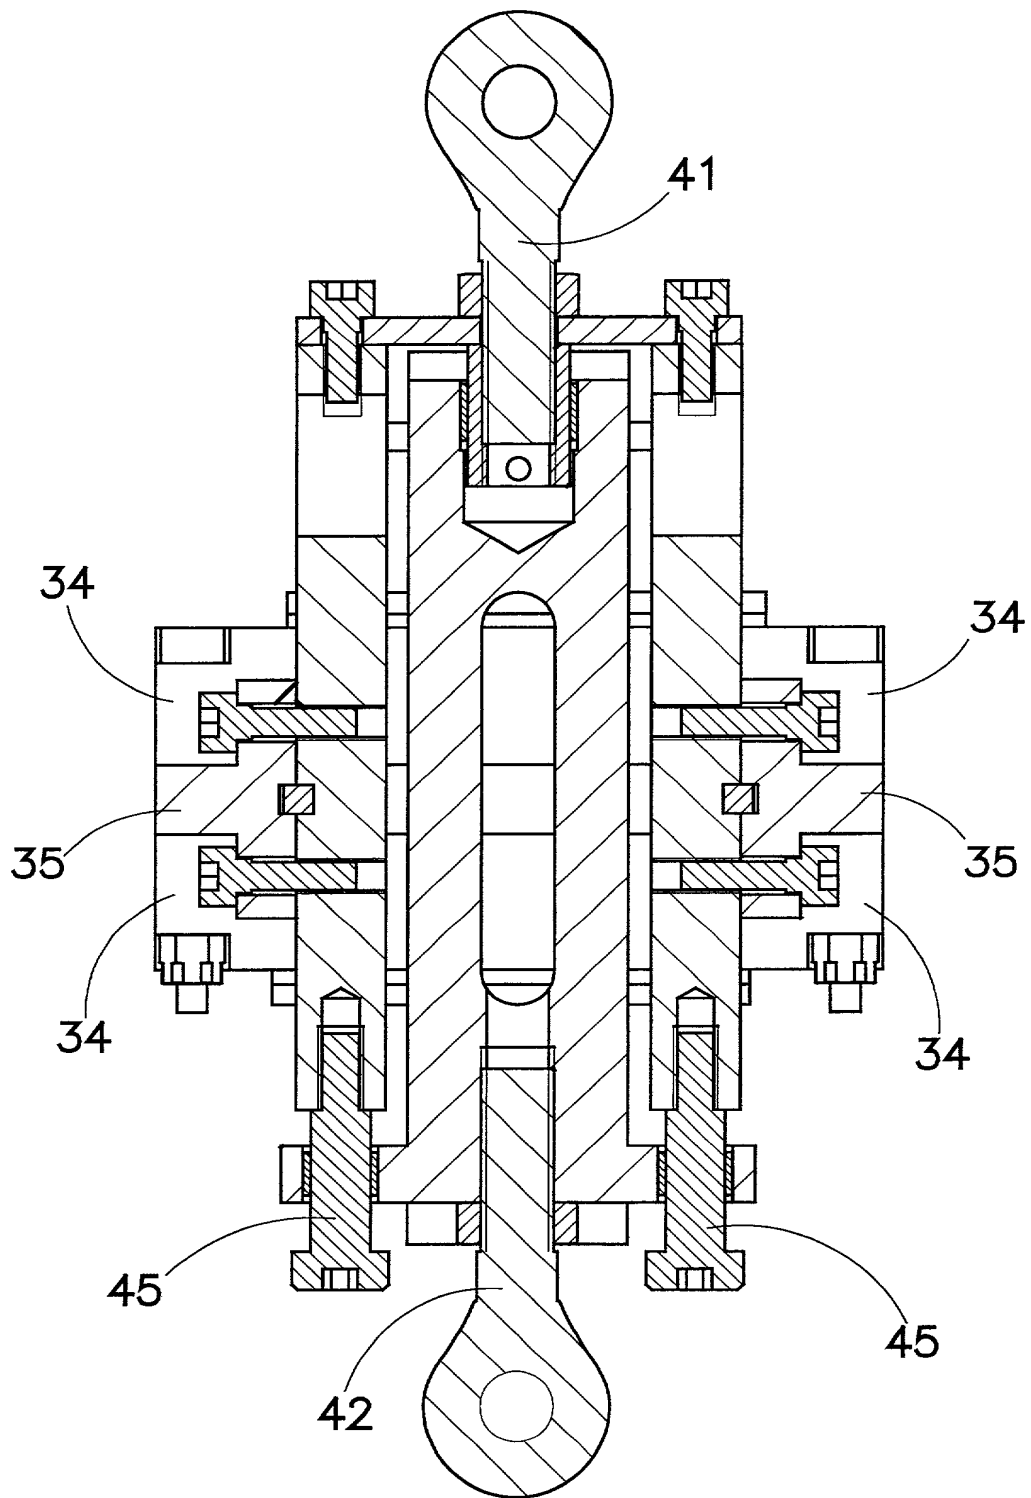


FIG.15